



EN Operating instructions.pages 1 to 6
Original

Content

1 About this document

1.1 Function 1

1.2 Target group: authorised qualified personnel. 1

1.3 Explanation of the symbols used 1

1.4 Appropriate use 1

1.5 General safety instructions 1

1.6 Warning about misuse 1

1.7 Exclusion of liability 2

2 Product description

2.1 Ordering code 2

2.2 Special versions. 2

2.3 Purpose 2

2.4 Technical Data 2

2.5 Safety classification 2

3 Mounting

3.1 General mounting instructions. 2

3.2 Dimensions 3

4 Electrical connection

4.1 Important notes 3

4.2 Contact Options 3

4.3 Operating paths 3

5 Set-up and maintenance

5.1 Functional testing. 3

5.2 Maintenance 3

6 Disassembly and disposal

6.1 Disassembly. 3

6.2 Disposal. 3

7 EU Declaration of conformity

1. About this document

1.1 Function

This operating instructions manual provides all the information you need for the mounting, set-up and commissioning to ensure the safe operation and disassembly of the safety switchgear. The operating instructions must be available in a legible condition and a complete version in the vicinity of the device.

1.2 Target group: authorised qualified personnel

All operations described in this operating instructions manual must be carried out by trained specialist personnel, authorised by the plant operator only.

Please make sure that you have read and understood these operating instructions and that you know all applicable legislations regarding occupational safety and accident prevention prior to installation and putting the component into operation.

The machine builder must carefully select the harmonised standards to be complied with as well as other technical specifications for the selection, mounting and integration of the components.

1.3 Explanation of the symbols used



Information, hint, note:

This symbol indicates useful additional information.



Caution: Failure to comply with this warning notice could lead to failures or malfunctions.

Warning: Failure to comply with this warning notice could lead to physical injury and/or damage to the machine.

1.4 Appropriate use

The products described in these operating instructions are developed to execute safety-related functions as part of an entire plant or machine. It is the responsibility of the manufacturer of a machine or plant to ensure the correct functionality of the entire machine or plant.

The safety switchgear must be exclusively used in accordance with the versions listed below or for the applications authorised by the manufacturer. Detailed information regarding the range of applications can be found in the chapter "Product description".

1.5 General safety instructions

The user must observe the safety instructions in this operating instructions manual, the country specific installation standards as well as all prevailing safety regulations and accident prevention rules.



Further technical information can be found in the Schmersal catalogues or in the online catalogue on the Internet: products.schmersal.com.

The information contained in this operating instructions manual is provided without liability and is subject to technical modifications.

There are no residual risks, provided that the safety instructions as well as the instructions regarding mounting, commissioning, operation and maintenance are observed.

1.6 Warning about misuse



In case of improper use or manipulation of the safety switchgear, personal hazards or damages to machinery or plant components cannot be excluded. The relevant requirements of the standard EN ISO 13850 must be observed.

1.7 Exclusion of liability

We shall accept no liability for damages and malfunctions resulting from defective mounting or failure to comply with this operating instructions manual. The manufacturer shall accept no liability for damages resulting from the use of unauthorised spare parts or accessories.

For safety reasons, invasive work on the device as well as arbitrary repairs, conversions and modifications to the device are strictly forbidden, the manufacturer shall accept no liability for damages resulting from such invasive work, arbitrary repairs, conversions and/or modifications to the device.

2. Product description

2.1 Ordering code

This operating instructions manual applies to the following types:

E2-40/13-EF emergency stop pushbutton

In conjunction with contact elements

EF①...

No.	Option	Description
①	303	1 NC / 1 NC
	220	2 NC

in combination with light terminal block

ELE und LE24/9RD-2950 light terminal block with LED
or
ELDE.N-RD-GN-YE-24VDC-2950 tri-colour LED module



For more information about contact elements, refer to chapter 4.2.



By observing the information described in this operating instructions manual, the safety function and therefore the compliance with the Machinery Directive will be maintained.

2.2 Special versions

For special versions, which are not listed in the ordering code below 2.1, these specifications apply accordingly, provided that they correspond to the standard version.

2.3 Purpose

The E2-40/13-EF series emergency stop command devices are designed for use in emergency stop circuits to EN ISO 13850.

2.4 Technical Data

Device head:	
Standards:	EN ISO 13850, EN 60947-5-1, EN 60947-5-5, EN 60947-1
Design:	Emergency stop pushbutton with latching for front plate mounting
Unlocking type:	Draw unlocking
Fully insulated:	Yes
Degree of protection:	IP65
Mechanical life:	50,000 operations
Switching frequency:	10/h
Actuating force:	approx. 25 N
Material:	
- Operating unit material:	Plastic
- Front ring material:	Plastic
Colours	
- Operating unit colour:	red
- Front ring colour:	yellow
Dimensions:	
- Height:	42 mm
- Diameter of control button:	40 mm
- Hole, diameter:	22.3 mm + 0.4 mm
- Shape:	Round
Fixing	with mounting flange ELM

Tightening torque for the fixing screws:	0.6 Nm
Front plate thickness:	
- min. front plate thickness:	1 mm
- max. front plate thickness:	6 mm
Grid dimensions:	50 mm x 50 mm
Mounting position:	any
Ambient temperature:	-25° C ... +75° C
Contact element EF:	
Standards:	EN 60947-1, EN 60947-5-1
Material:	
- Material of the enclosure:	plastic, glass-fibre reinforced thermoplastic, self-extinguishing
- Material of the contacts:	fine silver, spring bronze or brass carrier
Utilisation category:	AC-15: 250 V / 8 A, DC-13: 24 V / 5 A
Rated insulation voltage U _i :	400 V
Rated impulse withstand voltage U _{imp} :	4 kV
Degree of pollution:	3
Overvoltage category:	III
Suitable low voltage:	≥ 5 VDC / 3.2 mA
Thermal test current I _{the} :	10 A
Max. fuse rating:	gG 10 A
Climatic resistance:	to EN 60068 Part 2-30
Ambient temperature:	-25° C ... +60° C
Switch travel:	depending on the contact execution
Positive break travel:	2 mm
Test voltage enclosed:	2,500 VAC
Actuating force at stroke end:	approx. 8 ... 15 N
Switching frequency:	1,200/h
Mechanical life:	10,000,000 operations
Bounce duration (100 mm/s):	< 5 ms
Resistance to shock:	110 g / 4 ms ... 30 g / 18 ms, no bouncing
Resistance to vibration:	20 g/10 ... 200 Hz
Contact force:	0.5 N each contact point = 2 N each contact bridge
Wiring configuration:	to EN 60947-1
Termination:	screw connection, flat plug-in connector, Cage-Clamp connection (in case of a Cage Clamp connection, the contact elements can not be additionally secured against loosening)
Tightening torque for the connecting screw:	max. 1 Nm
Cable section:	
- single-strand wire:	2 x (0.5 ... 2.5 mm ²)
- multi-strand wire with conductor ferrules with protective collar:	2 x (0.5 ... 1.5 mm ²)
- flat plug-in connector:	6.3 mm x 0.8 mm / 2 x 2.8 mm x 0.8 mm
Degree of protection:	
- Terminals:	IP20 (finger guard)
- Wiring compartments:	IP40 (with plug-in connector depending on the connector plug used)
Approvals:	cULus (save cage clamp connection)

2.5 Safety classification

Standards:	EN ISO 13849-1
B _{10D} (NC contact):	100,000
Mission time:	20 years

$$MTTF_D = \frac{B_{10D}}{0,1 \times n_{op}} \quad n_{op} = \frac{d_{op} \times h_{op} \times 3600 \text{ s/h}}{t_{cycle}}$$

(Determined values can vary depending on the application-specific parameters h_{op}, d_{op} and t_{cycle} as well as the load.)


3. Mounting

3.1 General mounting instructions

- Fit the emergency stop actuator in non-actuated condition by means of the ELM mounting flange, align and tighten (max. 0.6 Nm)
- Snap the ELE or ELDE light terminal block in the centre position of the ELM mounting flange (position 3).
- Snap the desired EF... contact elements onto the free positions to the right and to the left (position 1 and 2) next to the ELE or ELDE light terminal block.



The relevant mounting flange is included in the items supplied with the device head.

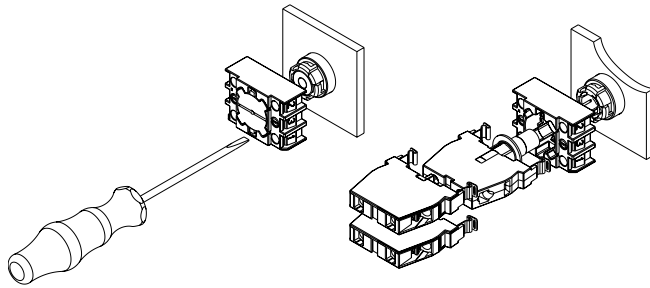


Contact elements of the EF contact system must be fitted in the second locking position and must, therefore, lie flush on the mounting flange after fitting.


3.2 Dimensions

All measurements in mm.

Emergency stop command device E2-40/13-EF

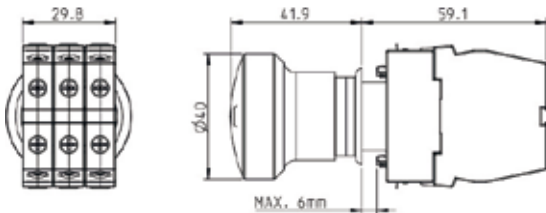

Contact element EF... in fitted condition

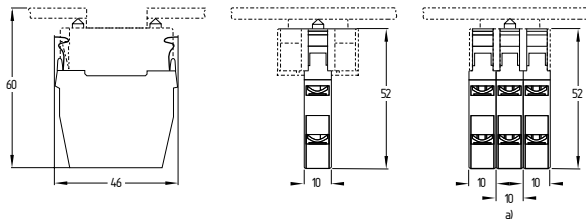

a) Maximum number of contacts: 2 contact elements, max. 4 contacts

4. Electrical connection

4.1 Important notes



The electrical connection may only be carried out by authorised personnel in a de-energised condition. At least one contact with positive break must be integrated in the safety circuit.



After wiring, the contact elements must be cleaned (i.e. remove excess cables etc.).

The fixing screws of the screw clamps must be tightened with a 1.0 Nm tightening torque.

Settle length x of the conductor:

- on cage clamp connections of type s or f: 5 ... 6 mm
- on screw terminals: 7 mm



4.2 Contact Options


The following contact variants can be combined together:

Screw or plug-in terminals:


- 1 x EF303 (1 NC / 1 NO) + 1 x EF220 (2 NC) or
- 2 x EF303 (1 NC / 1 NO each contact element) or
- 2 x EF220 (2 NC each contact element)

EFK cage clamp: contact data upon request


EF 220.1




EF 303.1




EF 220.2



EF 303.2



EF 220.3



EF 303.3




4.3 Operating paths

EF 220.1

EF 220.2

EF 220.3



EF 303.1

EF 303.2

EF 303.3



5. Set-up and maintenance

5.1 Functional testing

The safety function of the safety components must be tested. The following conditions must be checked and met:

- Correct fixing of the fitted component
- Check the integrity of the cable entry and connections
- Check the emergency stop command device for damage

5.2 Maintenance

A regular visual inspection and functional test, including the following steps, is recommended:

- Check the correct fixing of the emergency stop command device and the contact element
- Remove particles of dust and soiling.
- Check cable entry and connections.


Damaged or defective components must be replaced.

6. Disassembly and disposal

6.1 Disassembly

The safety switchgear must be disassembled in a de-energised condition only.


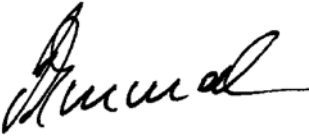
- Disassembly of the EF contact element(s).
- Remove the ELE or ELDE light terminal block.
- Undo the screws on the mounting flange and rotate the flange out of the bayonet.



6.2 Disposal

The safety switchgear must be disposed of in an appropriate manner in accordance with the national prescriptions and legislations.

7. EU Declaration of conformity

EU Declaration of conformity		
Original	K.A. Schmersal GmbH & Co. KG Möddinghofe 30 42279 Wuppertal Germany Internet: www.schmersal.com	
We hereby certify that the hereafter described components both in their basic design and construction conform to the applicable European Directives.		
Name of the component:	E2-40/13-EF	
Type:	See ordering code	
Description of the component:	Emergency stop pushbutton	
Relevant Directives:	2006/42/EC Machinery Directive 2011/65/EU RoHS-Directive	
Applied standards:	EN 60947-5-1:2017 EN 60947-5-5:1997 + A1:2005 + A11:2013 + A2:2017 EN ISO 13850:2015	
Person authorised for the compilation of the technical documentation:	Oliver Wacker Möddinghofe 30 42279 Wuppertal	
Place and date of issue:	Wuppertal, September 9, 2021	
		
	Authorised signature Philip Schmersal Managing Director	

E2-40/13-EF-A-EN



The currently valid declaration of conformity can be downloaded from the internet at products.schmersal.com.

