# **Heavy industry**

Industry brochure





### **Preface**

The Schmersal Group is known worldwide for its comprehensive program of switchgear and safey switchgear.

Safety – or machinery safety to be more precise – has been our core competence for decades.

We apply this concept worldwide – in more than 50 nations. The high amount of customerspecific series and variations demonstrates how seriously we are taking our mission to provide the optimal solution for each application.

As a medium-sized, owner-managed company we are sufficiently flexible to put this ambition into practice – day after day – in the most difficult applications. We provide safe solutions for your industry!

In order to enable us to provide you worldwide as soon as possible with customised solutions, we have set up a production network featuring six production plants located on three continents. Where needed, our service and consultancy services are at your disposal.

We have long-term experience of more than six decades in the heavy industry, considering that this is where the origins of the Schmersal Group lie, as a manufacturer of high-grade switchgear.

Today, our products are used wherever very particular requirements are applicable under difficult and rough operating conditions.

- Surface mining and mining industry
- Construction machines and utility vehicles
- Municipal and industrial vehicles
- Railways and railway infrastructure
- Shipyards and shipbuilding
- Cranes, hoists and conveyors
- Mixing plant and process technology
- Recycling
- Energy generation and processing
- Refineries and offshore technology

This brochure gives a first impression of our product range and its various application possibilities. Many switchgear that are presented in this brochure, are characterised by a very long life, even when used under extreme operational conditions. Underground or on the high seas, at temperatures below freezing or in hot plants, in explosion-endangered areas, regardless of moisture, vibrations or rough handling: this switchgear has been developed from scratch to meet the requirements of the heavy industry.



### Content

Preface	Page 2
Content	Page 3
Schmersal Worldwide     1.1 Offices in Germany     1.2 International Offices	
2. Product overview	Page 6
3. Raw material extraction	Page 8
4. Raw material handling and transport 4.1 Loading and unloading 4.2 Conveying plants 4.3 Heavy vehicles	Page 12
5. Raw materials processing 5.1 Metal production 5.2 Metal processing 5.3 Oil, gas, chemicals	Page 18
6. Contact	Page 22



### 1. Schmersal Worldwide

### 1.1 Offices in Germany

### Wuppertal



### K.A. Schmersal GmbH & Co. KG

- Founded in 1945
- Around 700 employees

#### Focal points

- Headquarters of the Schmersal Group
- Development and manufacture of switchgears and switching systems for safety, automation and lift engineering
- Accredited test laboratory
- Central research and development
- Logistics centre for European markets

### Wettenberg



### K.A. Schmersal GmbH & Co. KG

- Founded in 1952 (1997)
- Around 180 employees

### **Focal points**

 Development and manufacture of switchgears for operation and monitoring, safety-related relay modules and controls as well as switchgears for explosion protection

### Mühldorf / Inn



### Safety Control GmbH

- Founded in 1994 (2008)
- Around 30 employees

### **Focal points**

 Development and manufacture of optical electronic components for safety and automation engineering

### Bergisch Gladbach



### Böhnke + Partner GmbH Steuerungssysteme

- Founded in 1991 (2013)
- Around 70 employees

### **Focal points**

 Development and manufacture of components, controls and remote diagnostic systems for the lift industry

### 1. Schmersal Worldwide

### 1.2 International Offices

### Boituva / Brazil



### **ACE Schmersal**

- Founded in 1974
- Around 400 employees

#### **Focal points**

- Manufacture of electromechanical and electronic switchgears
- Customer-specific control systems for the North and South American market

### Shanghai / China



### Schmersal Industrial Switchgear Co. Ltd

- Founded in 1999
- Around 165 employees

### **Focal points**

 Development and manufacture of switchgears for safety, automation and lift engineering for the Asian market

### Pune / India



### **Schmersal India Private Limited**

- Founded in 2013
- Around 60 employees

### **Focal points**

 Development and manufacture of switchgears for safety, automation and lift engineering for the Indian market



### Position detection

### **Position switches**

- Metal and thermoplastic enclosure
- Wide range of actuators
- ATEX II 2D, II 3D, II 2GD, II 3GD
- Temperature range –40 °C ... +200 °C

### Belt alignment switches

- Aluminium and grey cast iron enclosure
- Different roller lengths and diameters available
- Independent switching points
- ATEX II 2D
- Temperature range –40 °C ... +200 °C

### Sensors

- Metal and thermoplastic enclosure
- Cylindrical or square enclosure
- Protection class IP65, IP67, IP69K
- Switch distances to 50 mm

### Safety guard monitoring

- Safety switch
- Solenoid interlocks
- Safety sensors

### Optoelectronic safety devices

■ Safety light barriers, safety light grids and curtains

# Command and signalling devices

### Control devices and indicator lights

- N-series with high protection class IP 67/69K
- R-series in metal enclosure for rough ambient conditions ATEX II 2GD
- Spring-return/maintained joystick switches with high protection classes IP65, IP67, IP69K and a temperature range of -40 °C ... +80 °C



### Command and signalling devices

### Pull-wire emergency-stop switches

- Aluminium and grey cast iron enclosure
- One-side and two-side operating principle
- Wire pull and breakage detection
- ATEX II 2D, II 3D
- Temperature range –30 °C ... +80 °C
- Dupline two-wire bus

### Foot switch

- Aluminium die cast enclosure
- Safety / process function
- One or two pedals
- Different switching and contact variants
- Temperature range –25 °C ... +60 °C

### Safe signal processing

### Safety monitoring modules

- Monitoring of electromechanical and non-contact switchgear
- Safety outputs with STOP 0 or STOP 1
- Signalling outputs for diagnostic

### PROTECT- SELECT

- Flexible compact safety controller
- Simple and flexible parameter setting
- Optimal adaptation of the basic programme to the individual application
- Connection of up to 9 dual-channel safety switching devices (with or without potential) up to PL e/SIL 3
- Safety semi-conductor and relay outputs with STOP 0 or STOP 1















IEC 60947-5-1 **DIN EN ISO 13850** DIN EN 60947-5-5

DIN EN 60947-5-1 EN 620, BGI 710 DIN EN 60204-1

### 3. Raw material extraction

Raw materials are needed on all continents of the world. The requirements placed on the ambient conditions to be applied for man and machine in underground or surface mining are accordingly demanding. The applied technology must function perfectly at all times - under all circumstances, such as very low and high temperatures, dust concentrations of up to 30 g per m², weathering, rain, ice or intensive UV radiation. Our position switches, pull-wire emergency stop switches and command devices are especially adapted to these ambient conditions. However, should something happen, it is good to know that Schmersal has representations all over the world to adequately serve its customers.



### **Heavy-duty position** switches

- Grey cast iron enclosure
- Different contact variants
- Wide range of alternative actuators
- -40 °C ... +200 °C
- Protection class IP65

### Pull-wire emergencystop switches

- Metal enclosure
- Protection class IP65
- One-side or two-side operating principle
- Wire pull and wire breakage monitoring
- -30 °C ... +90 °C

#### Safety-monitoring modules

- evaluation of contacts without potential, e.g. emergency-stop command devices
- and position switches ■ Standstill monitor
  - Fail-safe delay timer

### Control devices and indicator lights

- Suitaible for the signal R-range for heavyduty industrial applications
  - Mounting hole Ø 22.3 mm
  - Stainless steel IP69K
  - Indicator lights with LED

### Standstill and speed monitoring

■ DIM 1.1 standstill monitor with IFL proximity switch for the simple speed monitoring on conveyor belts with smoothly adjustable switching window

Code numbers: 250, 422, 441

Code numbers: T3Z, ZQ9

Code numbers: SRB, AES

Code number: "R" Programm Code numbers: DIM, IFL









In addition to the here presented practical examples, our product programme includes other products and system solutions for the safe evaluation of signals, switching and detection including the necessary accessories. The application examples shown in this brochure are an excerpt of the application possibilities. For the protection of hazardous plants in the operating, service or maintenance areas of devices, machinery or plants in the mining industry, we also have a comprehensive portfolio of safety mats, solenoid interlocks and trapped key systems.



### End and position detection on mobile mining equipment

Wherever mining equipment is used, the switchgear of the T/M 250/422/441 family of switches safely and reliably perform, even under the roughest application and ambient conditions. Therefore, they are a perfect fit for e.g. the detection on slewing gear drive units, jibs and accessory equipment.

The large range of different actuators provides for a large degree of freedom for all necessary presence, position or end detections. Different contact variants, with gold contacts or contact tips optionally are also available, these provide for a reliable processing of electronic signals with the lowest contact resistances. The enclosure and the cover of the switchgear are made of grey cast iron and are available with protection class IP 65 to IEC/EN 60529. With the T option, the majority of our switchgear families can be used in the extended temperature range of -40 °C ... +200 °C.



### Control stations and command panels

Also the command and control devices installed at the man-machine interface of machinery and plants must be designed for rough ambient conditions. The multifunctional joystick switches for up to four actuating directions feature many contacts and variants for complex applications with protection class IP65, IP67 and IP69K.

The wide-ranging programme of "R" switches for command panels for mobile and stationary plants is available optionally in a metal

version with high protective collar against inadvertent contact. The oil-resistant large switch surfaces can also be operated reliably whilst wearing gloves.

The emergency stop switches are equipped with positive-locking and safe latching, optionally with increased protection against inadvertent unlocking. The message buttons and indicator lights feature bright LED's for a maximum signal effect at very low maintenance costs.



### Speed monitoring in mining operations

We have developed a customised solution for the safe standstill or speed monitoring on belt and conveyor systems in the raw materials extraction.

With the inductive, metal encapsulated proximity switches of the IFL series and the electronic specifically designed DIM 1.1 speed

monitoring (standstill monitor), the speed of the conveyor plant can be safely monitored within a freely adjustable speed window. In this way, overloaded conveyor belts and drive failures can be reliably detected. The solution operates without contact, is safe and can be smoothly installed.

### 4. Raw material handling and transport

### 4.1 Loading and unloading

For the different positioning and control tasks to be executed during loading and unloading operations, we offer a comprehensive programme of mechanical and electromechanical system components with special approvals. Some standardised switch series for instance have a GL and/or IECex approval. In addition to that, the large choice of actuators enables the most various applications on "ship-to-shore" plants. Integration in automation concepts is possible through the AS-i field bus system. Our non-contact magnetic switches of the BN 20 2rz type are installed on the fastest and state-of-the-art "ship-to-shore" crane installations all over the world.



### **Position switches** to EN 50041/47

- Variants with GL, EX or IEC EX approval
- enclosure
- Oil- and fuel-resistant High protection class
- Large range of actuating elements

### Inductive proximity switches

- Variants with GL approval
- Metal or thermoplastic Standard forms M8, M12 to M30

  - A wide range of accessories is available

Code number: IFL

### Magnetic reed switches

- High actuating speed Up to 4 actuating
- Safe establishment of contact
- Large switching distances
- Special variants, e.g; BN 20 2RZ. Safe 2-channel crane limit switch

Code number: BN 20

### **Maintained joystick** switch

- directions
- Large selection of contact variants
- Protection class IP65. IP67 and IP69K
- Suitable for outdoor use
- -40 °C und +80 °C

Code number: Joystick switch

### Gear switch

- Metal enclosure with shock-resistant thermoplastic cover
- Different cam forms for various switching travels
- Smooth switching point setting

Code numbers: G50, G150

Code numbers: 235, 236, 256, 335, 336, 355













During the loading and unloading of Super-Post-Panamax vessels, speed, accuracy and failsafe performance are of paramount priority. That is the reason why many world market leaders of the crane and shipbuilding industry use switchgear from Schmersal. From loading hatch monitoring up to the detection of hoisting and lifting devices, the Schmersal programme also covers applications exposed to the harshest environmental conditions.




### Loading hatch monitoring and positioning

Our standardised switches to EN 50047/50041 are the perfect solution to be used on vessels, in bulk goods loading or other transhipment plants. They have a GL approval and can be used on vessels without any concern.

Some of the standardised switches have an IECEx approval with equipment identification "de IIC T6, Ex tD A21 IP65 T80 °C" and therefore can be used in port areas as well as on vessels in Dust Ex Zones. Typical

applications in the heavy industry are, for instance the protection of loading hatches and bunker covers as well as position and limit position monitoring.

Through the optional AS-i field bus interface, the standardised switches can also be integrated in existing central automation concepts.




### Pre- and end-of-travel shutdown at high travel speeds.

The travel speeds of the modern ship-to-shore crane plants exceed the mechanical actuation limit of 1.5 m/s. In the bulk handling industry, contemporary crabs already run at travel speeds of 4 m/s.

Our non-contact BN20 2RZ magnetic switches with a switching distance of up to 50 mm provide for a safe pre- and end-of-travel shutdown of crabs or crane tracks at travel speeds up to 5 m/s.

The signals of the dual-channel magnetic switch can be evaluated through a safe PLC control. It is also suitable for the autarkic use in combination with a safety-monitoring module from the Schmersal programme. In this case, applications up to SIL 3 to IEC 61508 or Performance Level e to EN ISO 13849-1 can be set up.



### End-of-travel shutdown on hoists and gear drive units

The plants used in hoisting and conveying technology are an important field of application for the gear switches of the series G50 and G150.

The metal enclosure with shock-resistant plastic enclosure features a fast and smooth switching point setting through front-adjustable cam disks. Different switch travels can be selected by means of different cam forms.

Dependant upon the contact configuration, this switchgear is used for the end-of-travel shutdown or the positioning of movement sequences on crane plants or winches.

Both series are available with protection class IP 65 and are suitable for use at temperatures from  $-30\,^{\circ}$  C ...  $+80\,^{\circ}$  C.

### 4. Raw material handling and transport

### 4.2 Conveying plants

Switchgear from Schmersal is used all over the world, wherever bulk goods are shipped by road, rail or ship. Our clientele includes the construction of heavy machinery and plants as well as maintenance companies, such as operators of gravel and cement plants, concrete prefabrication and mixing plants, waste disposal sites and recycling centres and - last but not least - the energy and power industry with mining activities, conveying plants and terminals as well as coal-fired power plants. Whatever is conveyed through these plants, is irrelevant. Mineral raw materials, seeds, animal feedstuffs, ores or coal: Schmersal offers the right switchgear for all kinds of bulk goods and conveyor plants.



### Pull-wire emergencystop switches

- Metal enclosure
- Protection class IP65
- One-side or two-side operating principle
- Wire pull and wire breakage monitoring
- -30 °C ... +90 °C

### Safety-monitoring modules

- Suitaible for the signal evaluation of contacts without potential, e.g. emergency-stop command devices and position switches
- Standstill monitor
- Fail-safe delay timer

#### Code numbers: SRB, AES

### Belt alignment switch/ Control devices and Slack-wire switch

- Grey cast iron enclosure ■ Different roller
  - lengths and switching points for the pre- and main shutdown
- -40 °C ... +200 °C

# Code numbers:

## Belt alignment switch, "R" Programm

### **Enclosure for surface** mounting

- Robust version in aluminium or stainless steel
- 1 5 command positions
- Protection class IP69K
- Easy-to-install

slack-wire switch

Code number:

indicator lights

R-range for heavy-

duty industrial

applications

■ Mounting hole Ø 22.3 mm

Indicator lights

with LED

Code number: NRG

Code numbers: T3Z, ZQ9









In the mining of raw materials, bulk goods are often loaded directly onto vessels or trains over long distances for transport, extended conveyor plants, sometimes of multiple kilometres long, are used. For the classic applications on conveyor plants, we have a comprehensive portfolio of solutions for safe switching and for the standstill and speed monitoring including different network solutions.



### Emergency stop shutdown on conveyor belts

Our pull-wire emergency-stop switches guarantee a reliable emergency stop function with wire breakage monitoring on conveyor plants over a distance of 50 m on one side and 2 x 50 m on both sides. The roller lever is insensitive to external influences such as torsion, vibrations and temperature variations. If the pull-wire switch is actuated, it latches in the emergency stop position and can only be

released by actuation of the release device, optionally operated by key selectors. The devices meet the requirements of EN 60947-5-5.

In combination with our safety-monitoring modules or network options, we offer you complete safety-related systems for emergency-stop shutdown to PL e.



### **Belt alignment monitoring**

Belt alignment switches monitor the straight running of conveyor plants. If the conveyor belt runs off-centre on the conveyor rollers, the switchgear is activated. Through the contact staggering or as of a belt misalignment of 15° for instance, a warning is generated through an auxiliary contact. The conveyor belt is then shutdown by the main contact as of a misa-

lignment of 25° for instance. Special staggered contacts are available upon request.

In addition to multiple versions of belt alignment switches, we offer a comprehensive programme of rollers with different lengths, diameters and materials.



### Command devices on transport and conveyor plants

Dust, varying temperatures and an often "rough" handling: command devices installed on transport and conveyor plants must be able to permanently withstand harsh conditions. Our robust command devices and indicator lights, joystick switches and surface-mounted enclosures have been especially developed for such applications and provide for a safe switching.

The range of "R" switches is optionally available in a metal version with a high

protective collar against inadvertent contact. The oil-resistant large switch surfaces can also be operated reliably whilst wearing gloves.

The emergency stop switches are equipped with positive-locking and safe latching, optionally with increased protection against inadvertent unlocking. The message buttons and indicator lights feature bright LED's for a maximum signal effect at very low maintenance costs.

### 4. Raw material handling and transport

### 4.3 Heavy vehicles

To ensure safe switching on mobile work equipment and machinery, we offer a variety of different switchgear. They are used in farming and construction machinery such as municipal vehicles and materials handling equipment as well as in the heaviest mining equipment such as dredges and dumpers. We offer a large range of components and system solutions for various requirements, ranging from – to name just a few – the level monitoring of bulk goods to safety guards installed on arbitrary components of mobile machinery.



### Level switches

- Aluminium enlosure
- Protection class IP65 with or without
- -30 °C ... +90 °C
- Actuation of the shutdown when the pedal is deflected beyond 30° in all directions

### Foot switch

- 1 or 2 foot pedals
- protective shield
- Variants with safety function
- Protection class IP65
- -25 °C ... +85 °C

### **Enabling switches**

- Thermoplastic enclosure
- Protection class IP65
- -10 °C ... +65 °C
- Good resistance to oil and petroleum spirit

### ■ Metal enclosure

- Good resistance to oil enclosure and petroleum spirit 

  Snap- or slow action
- For left or right hinged doors
- Easv to install
- Thermoplastic

Hinged safety switches Micro switches Z/T 415

- NC contact positive break
- -30 °C ... +85 °C
- Protection class IP65 Protection class IP40

on request

Code number: TFH

Code number: 7SD

Code number: TVS

Code number: 7/T 415







On heavy machinery and vehicles, the operating and maintenance staff are exposed to high potential hazards. To protect the operating staff, the driver seats of e.g. farming vehicles or road building machinery are equipped with safety switches as deadman's control. Alternatively, foot switches must be actively operated to acknowledge the correct presence of the operator.

Potential hazards for the maintenance staff are also concealed behind the service and maintenance doors of heavy machinery or vehicles. Here, actively operated enabling switches or safety mats can provide relief – or solenoid interlocks, which keep the doors closed until the hazardous movement has stopped.



### Level monitoring

On belt transfer stations or in silo installations, the level of bulk goods such as granulates, powder, ore or seeds often needs to be monitored. For this application, Schmersal has developed a level switch for heavy-duty applications on the basis of the 441 type position switch. The gear stick ensures that the switch is actuated when deflected > 30°.

It comes with protection class IP65 and is suitable for ambient temperatures of -30 °C ... +90 °C.



### Protection of doors, flaps and protective covers

For the protection of doors, flaps and protective covers on mobile machinery, we offer the largest range of safety switchgear. The spectrum ranges from position switches with safety function over electromechanical safety switches and hinged safety switches to tamper-proof safety switches with magnetic or RFID-coded targets.

If a direct shutdown of the moving machine elements is impossible, we offer multiple product families of solenoid interlocks with different designs and interlocking forces up to 3500 N. Mechanical interlocking concepts with degrees of freedom in three directions provide for a smooth integration in the surrounding construction.



### Deadman's control and self-driving machinery

The Z/T 415 microswitch is only one of the many microswitch series in the Schmersal programme. Microswitches are often used on self-driving construction machinery and work equipment, e.g. as a deadman's control in the driver's seat.

Foot switches are also frequently used on self-driving machines and equipment.

They are used either as active switchgear or in accordance with the prevailing safety provisions as an enabling switch – for instance, if actuation by hand is impossible because other tasks needs to be completed using both hands.

### 5. Raw materials processing

### 5.1 Metal production

The metal-processing industry is the original field of application of the switchgear from Schmersal. Shortly after its establishment in 1945, the company developed and manufactured switchgear guaranteeing a safe switching and the highest reliability under extreme production and ambient conditions.

Our heavy-duty switchgear is made of grey cast iron and therefore is optimally protected against abrasive dust and scale. With the optional ceramic inserts, they can be used in temperature ranges from -40 °C ... +200 °C.

For the integration in automated plants, variants with gold contacts or special gold-nickel contact tips with the lowest contact resistance are available. The large range of series-produced switchgear and actuators enables the use of series standards without mechanical adaptations.



### **Heavy-duty position** switches

- Grey cast iron enclosure
- Different contact variants
- Wide range of alternative actuators
- -40°C ... +200°C
- Protection class IP65

### Magnetic reed switches

- High actuating speed
- Safe establishment of contact
- Large switching distances
- Special variants, e.g. BN 20 2RZ: safe Adjustable ball 2-channel limit switch for crane plants

### Safety solenoid interlocks

- Robust metal enclosure
- With optional emergency handle
- Long life
- Holding force 3500 N
- latching up to 400 N

### Trapped key systems

- Metal enclosure
- Good resistance to oil and petroleum spirit
- Cable-free protection

### **Control devices and** indicator lights

- R-range for heavyduty industrial applications
- Mounting hole Ø 22,3 mm
- Indicator lights with LED

Code numbers: 250, 422, 441

Code number: BN 20

Code number: AZM 415

Code number: SHGV

Code number: "R" program





Switchgear from Schmersal is used in the entire heavy industry. The different basic designs are suitable for extended temperature ranges and high mechanical stresses. They can be combined with a large range of actuators, contact variants and contact configurations. Adjustable switching points and a comprehensive programme of accessories provide for an additional extension of the application range.


The result: highly reliable heavy-duty switchgear, which stand the test for decennia under rough operating conditions – in the entire process chain of the steel industry as well as in other sectors of metal processing.



#### Position detection under extreme environmental conditions

The switchgear series T/M 250, 422 and 441 are used in the entire steel processing industry – amongst others for the positioning of revolving towers, distributor trucks, shuttles, flame cutters / welding torches, stamping machinery or chain conveyors. They are characterised by a robust grey cast iron enclosure, optional contact configuration in gold or gold/nickel alloy and an extended temperature range with optional ceramic inserts from –40 °C ... +200 °C.

Many designs and different actuating elements offer a large variety of possibilities. Even under the very unfavourable ambient conditions, which are typical to the steel production and processing industry, these heavy-duty position switches operate reliably and feature a long life.



### End-of-travel and area shutdown on highly-available crane plants

The travel distances of many cranes in the metal industry are long and are frequently covered at speeds of over 1.5 m/s. The 2-channel magnetic switch BN20 2rz has been especially developed for this kind of applications. With a switching distance of up to 50 mm and travel speeds of up to 5 m/s, they provide for a safe monitoring of the pre-tripping and end-of-travel shutdown

of crabs or runways. The sensors can be integrated into existing safety control systems or evaluated in an autarkic manner by a safety-monitoring module of the Schmersal programme – applications up to SIL 3 or PL e. Other actuators and electromagnets for area shutdown and compensation coils for cable distances > 100/200 m complete the system.



### Protection of safety guards on robust fenced plants


Many plants of the steel production and processing industry, e.g. alloying and continuous casting plants, segment drives, slab feeders and welding torches or converters and ladle furnaces are often protected by means of heavy safety fences. Under the prevailing extreme conditions, the AZM 415 solenoid interlock is the perfect solution to protect the access to the plants. This solenoid interlock

essentially features a robust overall metal enclosure, a high holding force of 3,500 N, a protection against incorrect locking and a large selection of actuating and handle variants for all structural conditions. Ex versions, solutions for double doors and variants with adjustable ball latching are available also.

### 5. Raw materials processing

### 5.2 Metal refining

The steel or metal production industries usually include other processes such as pressing, forging, rolling, extracting, alloying or casting and moulding in various forms and dimensions. In addition to the already mentioned ambient conditions such as high temperatures and abrasive dusts, the switchgear is exposed to additional elements during these process steps, such as shocks, vibrations, water vapour and contact with aggressive or corrosive agents. For these special requirements, our programme includes reliable solutions.

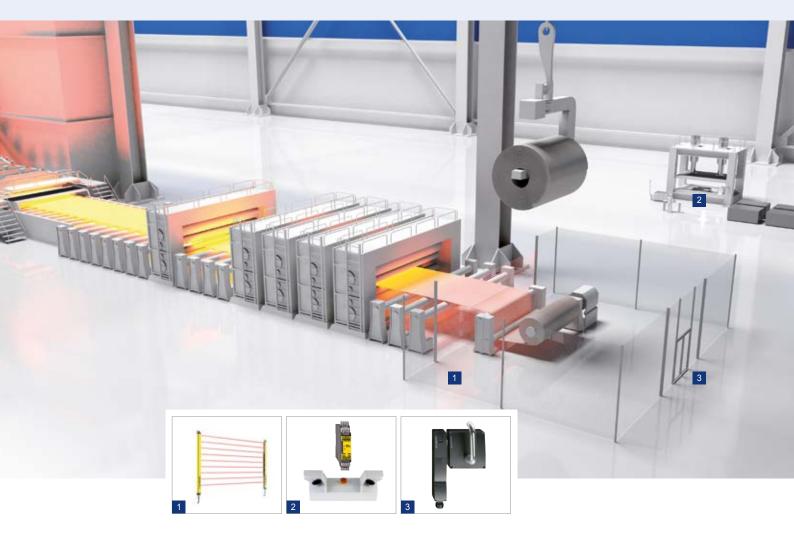

### Safety light curtains and safety light grids

- Protection class IP67 and IP69K
- Protection field heights from 170 mm to 1770 mm
- Resolution 14, 30 and 50 mm
- Protective enclosure for harsh industrial environments

Code numbers: 440, 420, 425

### **Two-hand control** panels

- Aluminium or thermo- Thermoplastic plastic enclosure
- Protection class IP54 and IP65
- Stand and wall mounting
- Monitoring to DIN EN 574-1 III C with safetymonitoring modules

Code numbers: SEP, SRB 201 and SRB 31 HC/R

### Solenoid interlocks

- enclosure
- Holding force 2000 N
- Electronic,coded system
- Self-monitored series-wiring of up to 31 sensors
- Optionally with emergency exit

Code number: AZM 200





"Safety in system – Protection for man and machine". According to this motto, the Schmersal Group offers its customers the world's largest programme of safety switchgear and safety switching systems for the protection of man and machine. With more than 60 years of experience in the heavy industry, we can offer practical solutions for almost any requirement and any application profile.



#### Protection of access and operating areas

The safety light grids and light curtains of the series SLC/SLG 440 and 420 are frequently used in the steel processing sector to protect access and operating areas e.g. on feed points of presses, large lathes, coil spindles, straightening machines, plate turnover devices and guillotine shears. Solutions for type 2/4 to IEC 61496-1, -2 as well as EN ISO 13849-1 or IEC 61508 are available. The aluminium enclosures with protection class IP 67/IP69K can be equipped with additional mechanical protection in the form of two optional protective enclosures.


This guarantees a safe operation, even under difficult circumstances. Integrated diagnostic and set-up tools support the user during the daily operating activities. Optional signalling and operating devices e.g. for blanking and cyclic mode provide for additional possibilities for the integration of the safety devices in the processes. Of course, universal system solutions with suitable safety-monitoring modules are available also.



### Safe operation of presses and forging plants with two-hand controls

The two-hand controls of the series SEPG 05 and 01 with corresponding safety-monitoring module SRB 201 ZH and SRB HC/R are tried-and-tested solutions for the operation of presses and forging plants. Different versions are available for wall, table and upright

mounting, which can be supplied as safe, ergonomic and completely equipped solutions, in accordance with your specifications and needs. Different versions are available for wall, table, upright mounting as well as for sedentary activities



### Protection against inadvertent interruptions of the process

If run-on movements can be expected at hazardous points – e.g. on winding and straightening machines – solenoid interlocks are used. This type of safety switchgear is also increasingly used to avoid the interruption of a production process by the operator opening a safety door. Schmersal offers an extremely comprehensive programme of solenoid interlocks – for instance the AZM 200 series featuring a slim design and an integrated door handle. Up to 31 doors can be wired in series up to a length of 200 m without detriment to the

safety category. The holding force amounts to 2000 N and for large safety doors, a three-point interlocking is available. The emergency exit can be operated with just a movement of the hand, even in a de-energised condition. A large range of actuating and handle variants provides you with efficient solutions regardless of the structural conditions

### 5. Raw materials processing

### 5.3 Offshore, oil and gas

For the use of heavy-duty switchgear in the offshore, oil and gas industry, the requirements placed on the ambient conditions mentioned before in the chapter "Metal processing" are even more stringent. In this situation, the switchgear also must meet criterions such as resistance to harsh weather conditions, resistance to increased UV radiation, resistance to sea or salt water and sometimes also explosion protection when used in Gas Ex Zones 1 and 2 and/or Dust Ex Zones 21 and 22.

For this very special field of applications, we also offer a comprehensive product portfolio. A few examples:



### **Position switches** to EN 50041/47

- Variants with GL, EX Robust metal or IECEX approval
- Metal or thermoplastic Optionally with enclosure
- Oil- and petrolresistant
- Wide range of alternative actuators

### Solenoid interlocks

- enclosure
- doorhandle
- Long life
- Holding force 3500 N
- Adjustable ball latching up to 400 N
- Also for double doors

### Trapped key systems Safety sensors

- Metal enclosure
- Good resistance to oil and petroleum 

  Self-monitored spirit
- Cable-free protection
- Ex-certified to II2GD c 85°C X
- Electronic, non-contact coded system
- series-wiring of 16 sensors up to 200 m
- Ex-certified to nA IIC T6 X, Ex tD A22 IP67 T70° C X
- Solution up to SIL 3 or PLe

Code numbers: 235, 236, 335, 336, EX 235, EX 335, EX 355

Code number: EX-AZM 415

Code number: EX-SHGV

Code number: EX-CSS











In chemical parks and refineries as well as on vessels and oil platforms, the monitoring of sliding pistons and compartments as well as the access protection of sensible tank plants, maintenance or service areas becomes increasingly important. For these applications, we offer different solutions – from robust position switches to tamper-proof safety systems.



#### Monitoring of the valve position in the oil and gas industry

Detection of the positions of sliding pistons, valve slides and partition walls, monitoring of the position of hatch openings and service flaps, protection of deck cranes or other equipment: the standardised switches from Schmersal with and without Ex approval are the perfect choice for chemical parks, offshore platforms or ships in the oil and gas industry.

Through the optionally available ASi Safety field bus, the standardised switches can also be quickly and smoothly integrated in existing central automation concepts.



### Entrance monitoring in tank farm, petrol depots and maintenance rooms

Under extreme operating conditions, the AZM 415 Ex solenoid interlock is suitable for the protection of larger safety fences in tank farms and petrol depots. It is also suitable for preventing inadvertent access to plants, service or maintenance areas with potential hazards.

Many users, use this solenoid interlock because of the robust overall-metal enclosure, the protection against incorrect locking, the high holding force of 3,500 N and the large

range of actuator and handle variants.

Optionally, solutions for double doors or adjustable ball latchings are available.

As an alternative to solenoid interlocks, we offer our modular, mechanical Ex trapped key system called SHGV, which is also available with explosion protection certification. This system offers the advantage that hazardous plants can be cost-efficiently protected without electrical installation.



### Non-contact position monitoring of partition walls, hatches, etc.

If the position of e.g; hatches, partition walls or service flaps need to be monitored without contact and under Ex protection conditions, the use of the Ex safety sensors of the CSS series is recommended.

Up to 16 safety sensors can be wired in series over a distance of 200 m without detriment

to the safety category. In this way, large hazardous areas e.g. hatches and flaps on large plants can be protected in a simple manner

With this system, solutions up to SIL 3 and PL e can be created.

### **Addresses**

■ Hauptsitz - Headquarters K.A. Schmersal GmbH & Co. KG Postfach 24 02 63,

42232 Wuppertal Möddinghofe 30 42279 Wuppertal Phone: +49 202 6474-0 Fax: +49 202 6474-100 info@schmersal.com www.schmersal.com

#### Germany

Leipzig

K.A. Schmersal GmbH & Co. KG Vertriebsbüro Leipzig

Servicepark Druckereistraße 4 04159 Leipzig

Phone: +49 341 48734-50 Fax: +49 341 48734-51 vbleipzig@schmersal.com

KSA Komponenten der Steuerungsund Automatisierungstechnik GmbH Pankstraße 8-10 / Aufg. L

13127 Berlin Phone: +49 30 474824-00 Fax: +49 30 474824-05 info@ksa-gmbh.de www.ksa-gmbh.de

■ Hamburg / Münster K.A. Schmersal GmbH & Co. KG Vertriebsbüro Hamburg

Innungsstraße 3 21244 Buchholz i.d.N. Phone: +49 41 81 9220-0 Fax: +49 41 81 9220-20 vbhamburg@schmersal.com

**ELTOP GmbH** 

Robert-Bosch-Straße 8 30989 Gehrden

Phone: +49 51 089273-20 Fax: +49 51 089273-21 eltop@eltop.de www.eltop.de

■ Wettenberg

K.A. Schmersal GmbH & Co. KG Vertriebsbüro Wettenberg Im Ostpark 2

35435 Wettenberg Phone: +49 641 9848-575 +49 641 9848-577 vbwettenberg@schmersal.com

Köln Stollenwerk

Technisches Büro GmbH

Scheuermühlenstraße 40

51147 Köln Phone: +49 2203 96620-0 Fax: +49 2203 96620-30

info@stollenwerk.de www.stollenwerk.de

Siegen

Siegfried Klein Elektro-Industrie-Vertretungen

In der Steinwiese 46 57074 Siegen Phone: +49 271 6778 Fax: +49 271 6770 info@sk-elektrotechnik.de www.sk-elektrotechnik.de

■ Saarland

Herbert Neundörfer Werksvertretungen GmbH & Co. KG Am Campus 5

66287 Göttelborn Phone: +49 6825 9545-0 Fax: +49 6825 9545-99 info@herbert-neundoerfer.de www.herbert-neundoerfer.de ■ Bietigheim

K.A. Schmersal GmbH & Co. KG Technologiezentrum

Pleidelsheimer Straße 15 74321 Bietigheim-Bissingen Phone: +49 7142 91028-0 +49 7142 91028-28 Fax: tzbw@schmersal.com

Bayern Süd

INGAM Ing. Adolf Müller GmbH Industrievertretungen Elly-Staegmeyr-Straße 15 80999 München Phone: +49 89 8126044 Fax: +49 89 info@ingam.de +49 89 8126925 www.ingam.de

■ Nürnberg

K.A. Schmersal GmbH & Co. KG Vertriebsbüro Nürnberg

Lechstraße 21 90451 Nürnberg Phone: +49 911 6496053 Fax: +49 911 63290729

vbnuernberg@schmersal.com

Europe

■ Austria – Österreich

AVS-Schmersal Vertriebs Ges.m.b.H. Biróstraße 17

1232 Wien Phone: +43-1-6 10 28 Fax: +43-1-6 10 28-1 30 info@avs-schmersal.at www.avs-schmersal.at

■ Belgium – Belgien Schmersal Belgium NV/SA Nieuwlandlaan 73

Industriezone B413 3200 Aarschot Phone: +32-16-57 16 18 Fax: +32-16-57 16 20 info@schmersal.be www.schmersal.be

Bosnia and Herzegovina Tipteh d.o.o. Sarajevo

Ulica Ramiza Salčina 246 71000 Sarajevo Phone: +387-61 92 36 23 nadir.durmic@tipteh.ba www.tipteh.ba

Bulgaria – Bulgarien CDL Sensorik Ltd.

Chavdar Voivoda Str, No.12, Office 1 7002 Ruse City Phone: +359 82 82 00 52 office@cdlsensorik.com www.cdlsensorik.com

■ Croatia – Kroatien

Tipteh Zagreb d.o.o. Ratarska 35 10000 Zagreb

Phone: +385 1-3 81 65 74 Fax: +385 1-3 81 65 77 tipteh@tipteh.hr www.tipteh.hr

■ Czech Republic - Tschech. Republik MERCOM COMPONENTA s.r.o.

Bechyňská 640 199 00 Praha 9 – Letňany Phone: +4 20-267 31 46 40-2 mercom@mercom.cz www mercom cz www.schmersal.cz

■ Denmark – Dänemark

Schmersal Danmark A/S Lautruphøj 1-3 2750 Ballerup Phone: +45-70 20 90 27 +45-70 20 90 37 info@schmersal.dk www.schmersal.dk

Finland - Finnland Advancetec Oy Äyritie 12 B

01510 Vantaa

Phone: +3 58-2 07 19 94 30 Fax: +3 58-9 35 05 26 60 advancetec@advancetec.fi www.schmersal.fi

■ France – Frankreich

Schmersal France BP 18 – 38181 Seyssins Cedex 8, rue Raoul Follereau 38180 Seyssins Phone: +33-4 76 84 23 20 technique@schmersal.com info-fr@schmersal.com www.schmersal.fr

■ Greece - Griechenland Kalamarakis Sapounas S.A. Ionias & Neromilou

PO Box 46566 Athens 13671 Chamomilos Acharnes

Phone: +30-210-2 40 60 00-6 +30-210-2 40 60 07 ksa@ksa.gr

Hungary – Ungarn NTK Ipari-Elektronikai és Kereskedelmi Kft

www.ksa.gr

Gesztenvefa u. 4. 9027 Győr Phone: +36-96-52 32 68 +36-96-43 00 11 info@ntk-kft.hu www.ntk-kft.hu

■ Iceland - Island Reykjafell Ltd.

Skipholti 35 125 Reykjavik Phone: +354-5 88 60 10 +354-5 88 60 88 reykjafell@reykjafell.is

■ Italy – Italien Schmersal Italia s.r.l.

Via Molino Vecchio, 206 25010 Borgosatollo, Brescia Phone: +39-0 30-2 50 74 11 Fax: +39-0 30-2 50 74 31 info@schmersal.it www.schmersal.it

■ Lithuania/Estonia/Latvia -Litauen/Estland/Lettland **BOPLALIT** 

Mus galite rasti: Balty pr. 145, LT-47125, Kaunas Phone: +370 37 298989 Phone: +370 37 406718 info@boplalit.lt www.boplalit.lt

■ Macedonia – Mazedonien

Tipteh d.o.o. Skopje Bul Partizanski odredi br:80, Lok:5 1000 Skopje Phone: +389-70-39 94 74 Fax: +389-23-17 41 97 info@tipteh.mk www.tipteh.mk

■ Netherlands - Niederlande Schmersal Nederland B.V. Lorentzstraat 31

3846 AV Harderwijk Phone: +31-3 41-43 25 25 +31-3 41-42 52 57 info-nl@schmersal.com www.schmersal.nl

■ Norway – Norwegen Schmersal Norge

Hoffsveien 92 0377 Oslo

Phone: +47-22 06 00 70 +47-22 06 00 80 info-no@schmersal.com www.schmersal.no

■ Poland – Polen Schmersal - Polska Sp.j. ul. Baletowa 29

02-867 Warszawa Phone: +48-22-8 16 85 78 Fax: +48-22-8 16 85 80 info@schmersal.pl www.schmersal.pl

■ Portugal – Portugal Schmersal Ibérica, S.L. Apartado 30

2626-909 Póvoa de Sta. Iria Phone: +351-30 880 09 33 info-pt@schmersal.com www.schmersal.pt

■ Romania – Rumänien CD SENSORIC SRL

Str. George Enescu 21 550248 Sibiu Phone: +40-2 69-25 33 33 Fax: +40-2 69-25 33 44 proiecte@cdl.ro www.cdl.ro

Russia – Russland
 OOO AT electro Moskau
 ul. Avtosavodskaya 16-2

109280 Moskau Phone: +7-49 5-9 21 44 25 Fax: +7-49 5-9 26 46 45 info@at-e.ru www.at-e.ru

OOO AT electro Petersburg

Polytechniskaya str, d.9,B 194021 St. Petersburg Phone: +7-81 2-7 03 08 17 Fax: +7-81 2-7 03 08 34 spb@at-e.ru

AT-Electronics Ekaterinburg

Bebelya str. 17, room 405 620034 Ekaterinburg Phone: +7-34 3-2 45 22 24 Fax: +7-34 3-2 45 98 22 ural@at-e.ru

■ Serbia – Serbien

Tipteh d.o.o. Beograd Moše Pijade 17A 11070 Vrčin, Belgrade Phone: +3 81 (0)11 - 8053 628 Fax: +3 81 (0)11 - 8053 045 office@tipteh.rs www.tipteh.rs

 Slovakia – Slowakei MERCOM COMPONENTA s.r.o. Bechyňská 640

199 00 Praha 9 – Letňany Phone: +4 20-267 31 46 40-2 mercom@mercom.cz www.mercom.cz www.schmersal.cz

■ Slovenia – Slowenien

Tipteh d.o.o. Ulica Ivana Roba 21 1000 Ljubljana Phone: +386-1-2 00 51 50 Fax: +386-1-2 00 51 51 Fax: +386-info@tipteh.si www.tipteh.si

■ Spain – Spanien

Schmersal Ibérica, S.L. Rambla P. Catalanes, 12 08800 Vilanova i la Geltrú Phone: +34-902 56 64 57 info-es@schmersal.com www.schmersal.es

■ Sweden - Schweden Schmersal Nordiska AB

F O Petersons gata 28 421 31 Västra Frölunda Phone: +46-31-3 38 35 00 +46-31-3 38 35 39 info-se@schmersal.com www.schmersal.se

### **Addresses**

#### Switzerland - Schweiz Schmersal Schweiz AG Moosmattstraße 3

8905 Arni Phone: +41-43-3 11 22 33 Fax: +41-43-3 11 22 44

info-ch@schmersal.com www.schmersal.ch

### ■ Turkey – Türkei Entek Otomasyon Urunleri San. ve Tic. A.S.

Mahmutbey Mah. Tasocagi Yolu Cad. No: 9 Entek Plaza 34218 Bagcilar / Istanbul Phone: +90 850 201 4141 Fax: +90 212 info@entek.com.tr +90 212 320 1188 www.entek.com.tr

#### ■ Ukraine – Ukraine VBR Ltd.

41, Demiyivska Str. 03040 Kyiv Ukraine Phone: +38 (044) 259 09 55 Fax: +38 (044) 259 09 55 office@vbr.com.ua www.vbr-electric.com.ua/schmersal

#### ■ United Kingdom – Großbritannien Schmersal Ltd.

Sparrowhawk Close Enigma Business Park Malvern Worcestershire WR14 1GL Phone: +44-16 84-57 19 80 +44-16 84-56 02 73 support@schmersal.co.uk www.schmersal.co.uk

#### Worldwide

#### ■ Argentina – Argentinien Condelectric S. A.

info@condelectric.com.ar www.condelectric.com.ar **ELECTRO-DOS** contacto@electro-dos.com.ar www.electro-dos.com.ar

#### Australia - Australien Control Logic Pty. Ltd.

25 Lavarack Avenue, PO Box 1456 Eagle Farm, Queensland Phone: +61-7 36 23 12 12 +61-7 36 23 12 11 sales@control-logic.com.au www.control-logic.com.au

#### ■ Belarus - Weißrussland ZAO Eximelektro

Ribalko Str. 26-110 BY-220033 Minsk, Belarus Phone: +375-17-298-44-11 Fax: +375-17-298-44-22 eximelektro@tut.by www.exim.by

#### Bolivia - Bolivien **Bolivien International** Fil-Parts

3er. Anillo, 1040, Frente al Zoo Santa Cruz de la Sierra Phone: +591 (3) 3 42 99 00 presidente@filparts.com.bo www.filparts.com.bo

### Brazil - Brasilien ACE Schmersal

Eletroeletrônica Industrial LTDA Rodovia Boituva – Porto Feliz, KM 12 Jardim Esplanada – CEP: 18550-000, Boituva, SP Phone: +55-15-32 63-98 00

+55-15-32 63-98 99 export@schmersal.com.br www.schmersal.com.br

#### ■ Canada – Kanada Schmersal Canada LTD.

15 Regan Road Unit #3 Brampton, Ontario L7A IE3 Phone: +1 905 495-7540 Fax: +1 905 495-7543 Info-ca@schmersal.com www.schmersal.ca

### ■ Chile - Chile

Vitel S.A. francisco@vitel.cl www.vitel.cl SOLTEX central@soltex.cl www.soltex.com.cl INSTRUTEC gcaceres@instrutec.cl www.instrutec.cl OEG jmp@oeggroup.com

www.oeggroup.cl **EECOL INDUSTRIAL ELECTRIC** ventas@eecol.cl

www.eecol.cl

### ■ PR China – VR China Schmersal Industrial

Switchgear (Shanghai) Co. Ltd. Cao Ying Road 3336 201712 Shanghai / Qingpu Phone: +86-21-63 75 82 87 +86-21-63 75 82 97 sales@schmersal.com.cn www.schmersal.com.cn

#### ■ Colombia – Kolumbien **EQUIPELCO**

aospina@equipelco.com www.equipelco.com SAMCO

ivargas@samcoingenieria.com www.samcoingenieria.com

### ■ Ecuador – Ecuador SENSORTEC S.A

AV. Napo y Pinto Guzmán Quito Phone: +593 091 40 27 65 +593 095 04 86 11 infogye@sensortecsa.com www.sensortecsa.com

### ■ Guatemala – Guatemala **PRESTELECTRO**

AV Petapa 44-22, Zona 12; Cent. Com Florencia 01012 Phone: +502 24 42-33 46 Anabella.Barrios@prestelectro.com www.prestelectro.com

#### ■ India – Indien Schmersal India Private Limited

Plot No G 7/1, Ranjangaon MIDC, Taluka Shirur, District Pune 412220, India Phone: +91 21 38 61 47 00 +91 20 66 86 11 14 info-in@schmersal.com www.schmersal.in

#### Indonesia - Indonesien PT. Wiguna Sarana Sejahtera

JI. Daan Mogot Raya No. 47 Jakarta Barat 11470 Phone: +62-21-5 63 77 70-2 +62-21-5 66 69 79 email@ptwiguna.com www.ptwiguna.com

#### ■ Iran – Iran **Omid Electric**

No. 1-5, 1st Floor, Azizi passage, Southern Lalehzar Str. Tehran ZIP: 1144944181 Phone: +98 21 33924027 +98 21 33911022 +98 21 33936635 sales@omidelectric.com

www.omidelectric.com

### ■ Israel – Israel

A.U. Shay Ltd. 23 Imber St. Kiriat. Arieh. P.O. Box 10049 Petach Tikva 49222 Israel Phone: +9 72-3-9 23 36 01 Fax: +9 72-3-9 23 46 01 shay@uriel-shay.com www.uriel-shay.com

### Japan – Japan

Schmersal Japan KK 3-39-8 Shoan, Suginami-ku Tokyo 167-0054 Phone: +81-3-3247-0519 +81-3-3247-0537 safety@schmersaljp.com www.schmersal.jp

#### ■ Korea – Korea

Mahani Electric Co. Ltd. 20, Gungmal-ro, Gwacheon-si, Gyeonggi-do 427-060, Korea Phone: +82-2-21 94-33 00 Fax: +82-2-21 94-33 97 yskim@mec.co.kr www.mec.co.kr

■ Malaysia – Malaysien Ingermark (M) SDN.BHD No. 29, Jalan KPK 1/8 Kawasan Perindustrian Kundang 48020 Rawang, Selangor Darul Ehsan Phone: +6 03-60-34 27 88 +6 03-60-34 21 88 enquiry@ingermark.com

#### Mexico - Mexiko ISEL SA de CV

mario.c@isel.com.mx

www.isel.com.mx
INNOVATIVE AUTOMOTION SOLUTIONS ias@iasmx.com www.iasautomation.com.mx EASA ENERGIA Y AUTOMATIZACIÓN

ias@iasmx.com www.iasautomation.com.mx DINAMICA S.A de C.V ias@iasmx.com www.iasautomation.com.mx SIGRAMA S.A de C.V ias@iasmx.com www.iasautomation.com.mx **VGR TECHNOLOGIES** ias@iasmx.com www.iasautomation.com.mx

### ■ New Zealand – Neuseeland **Hamer Automation**

85A Falsgrave Street Philipstown Christchurch, New Zealand Phone: +64-33 66 24 83 +64-33 79 13 79 sales@hamer.co.nz www.hamer.co.nz

#### ■ Pakistan – Pakistan Schmersal India Private Limited

Plot No G 7/1 Ranjangaon MIDC, Taluka Shirur, District Pune 412220, India Phone: +91 21 38 61 47 00 +91 20 66 86 11 14 info-in@schmersal.com www.schmersal.in

#### ■ Paraguay – Paraguay Brasguay S.R.L.

R. Internacional 07 KM 14; Minga Guazu Phone: +595 (61) 583-418 218 577 brasguay@brasguay.com.py www.brasquay.com.py

#### ■ Peru – Peru Fametal S.A. fametal@fametal.com

www.fametal.com ΔYD informes@ayd.com.pe

www.ayd.com.pe ■ Singapore – Singapur

AZAREL International Pte Ltd. Empire Techno Centre 30 Kaki Bukit Road 3 #01-10 Singapore 417819 Phone: +65-67 42 29 88 +65-67 42 26 28 sales@azarel.com.sg

www.azarel.com.sg

#### ■ South Africa - Südafrika A+A Dynamic Distributors (Pty) Ltd. 20-24 Augusta Road

Regents Park 2197 Booysens Phone: +27-11-6 81 59 00 Fax: +27-11-4 35 13 18 awkayser@iafrica.com

#### ■ Taiwan – Taiwan

Golden Leader Camel Ent. Co., Ltd. No. 453-7, Pei Tun Rd. Taichung City 40648, Taiwan Phone: +886-4-22 41 29 89 +886-4-22 41 29 23 camel88@ms46.hinet.net www.leadercamel.com.tw

### ■ Thailand – Thailand

Isensor Co. Ltd. 57/65 Soi Song Sa-ard Vibhavadirangsit Road Chomphon, Chatuchak Bangkok 10900 Phone: +66 - 2 - 276 8783 +66 - 2 - 275 5875 info@isensor.co.th www.isensor.co.th

### United Arab Emirates -Vereinigte Arabische Emirate Kempston Controls LLC

PO Box: 60998 St. 13, Umm Ramool, Dubai, U.A.E. Tel: +971 4 2987 111 Fax:+971 4 2987 113 Email: sales@kempstoncontrols.ae www.kempstoncontrols.ae

#### Uruguay – Uruguay Gliston S.A.

Pedernal 1896 - Of. 203 Montevideo Phone: +598 (2) 2 00 07 91 colmedo@gliston.com.uy www.gliston.com.uy

#### ■ USA – USA Schmersal Inc.

15 Skyline Drive Hawthorne, NY 10532 Phone: +1 8 88-4 96-51 43 +1 9 14-3 47-15 67 infousa@schmersal.com www.schmersalusa.com

### Venezuela - Venezuela

EMI Equipos y Sistemas C.A. Calle 10, Edf. Centro Industrial Martinisi, Piso 3, La Urbina, Caracas Phone: +58 (212) 2 43 50 72 ventas@emi-ve.com www.emi-ve.com

#### ■ Vietnam - Vietnam Ingermark (M) Sdn Bhd, Rep Office Unit 208, C6 Bldg., Block 1

My Dinh 1, New Urban Area Tu Liem District, Hanoi Phone: +84-4 287 2638 +84-4 287 2639 ingvietn18@ymail.com



# The Schmersal Group

In the demanding field of machine safety, the owner-managed Schmersal Group is one of the international market leaders. The company, which was founded in 1945, has a workforce of about 2000 people and seven manufacturing sites on three continents along with its own companies and sales partners in more than 60 nations.

Customers of the Schmersal Group include global players from the area of mechanical engineering and plant manufacturing as well as operators of machinery. They profit from the company's extensive expertise as a provider of systems and solutions for machine safety. Furthermore, Schmersal specialises in various areas including foodstuff production, the packaging industry, machine tool industry, lift switchgear, heavy industry and the automotive industry.

A major contribution to the systems and solutions offered by the Schmersal Group is made by tec.nicum with its comprehensive range of services: certified Functional Safety Engineers advise machinery manufacturers and machinery operators in all aspects relating to machinery and occupational safety – and do so with product and manufacturer neutrality. Furthermore, they plan and realise complex solutions for safety around the world in close collaboration with the clients.

### Safety Products



- Safety switches and sensors, solenoid interlocks
- Safety controllers and safety relay modules, safety bus systems
- Optoelectronic and tactile safety devices
- Automation technology: position switches, proximity switches

### Safety Systems



- Complete solutions for safeguarding hazard areas
- Individual parametrisation and programming of safety controllers
- Tailor-made safety technology be it for individual machines or a complex production line
- Industry-specific safety solutions

### Safety Services



- tec.nicum academy Seminars and training
- tec.nicum consulting Consultancy services
- tec.nicum engineering –
   Design and technical planning
- tec.nicum integration –
   Execution and installation

The details and data referred to have been carefully checked. Subject to technical amendments and errors.

### www.schmersal.com





